


b 5 mm



M18 x 1

Einbauhinweise
siehe Seite 71 ④
Installation notes
see page 71 ④

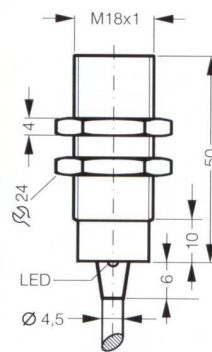

mm (typ.)
CAD ⇔
www.di-soric.de

5 mm

18 x 18 x 1 mm

10...35 V DC

pnp, 200 mA

< 6 mA

< 2,0 V

1000 Hz

3...15 %

-25...+70°C

500 V

IP 67

VA

2000 mm, PUR

DC 18 V 05 PSLK

DC 18 V 05 POLK

-

-

-